



器具光束	900 lm
上方光束	0 lm
下方光束	900 lm
最大光度	717 cd

初期値

光源	LED
光源型名	-
口金形式	-
色温度	昼白色(5000K)
保守率	良0.88 中0.86 否0.81
最大取付間隔	Max 1.14 H: Min 0.73 H
備考	使用環境を想定し、保守率を設定。

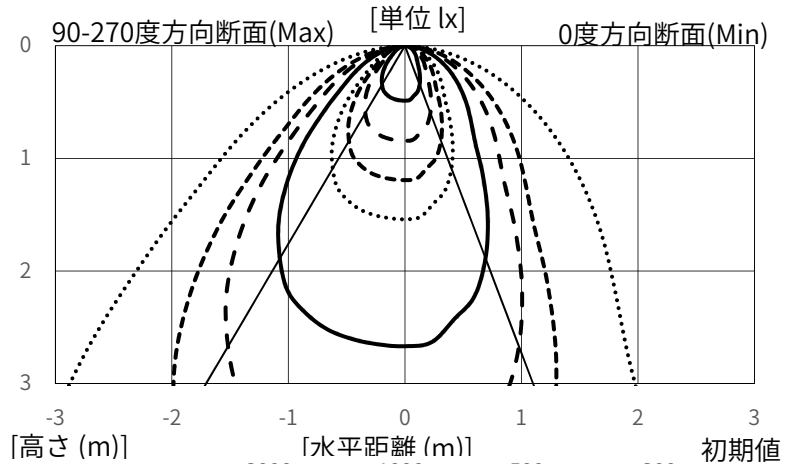

角度	光度[cd/1,000lm]			
	0	90	180	270
0	791	791	791	791
10	683	788	786	788
20	481	748	693	748
30	231	594	444	594
40	113	356	197	356
50	71	143	103	143
60	43	61	59	61
70	24	29	32	29
80	10	10	13	10
90	0	0	0	0
100	0	0	0	0
110	0	0	0	0
120	0	0	0	0
130	0	0	0	0
140	0	0	0	0
150	0	0	0	0
160	0	0	0	0
170	0	0	0	0
180	0	0	0	0

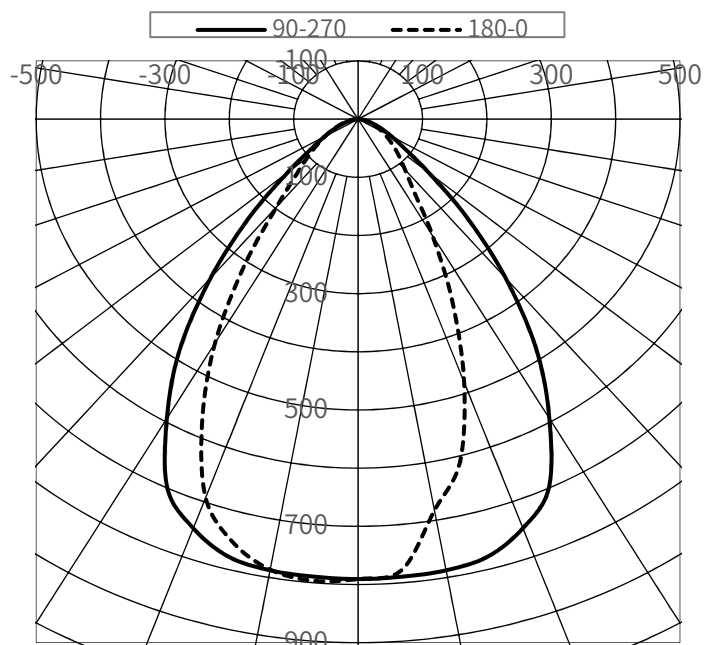

配光曲線(cd/1,000Lm)

反射率	天井				70				50				30				20				0							
	壁	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30
室指数	照明率(×0.01)																											
0.6	81	75	70	67	63	61	80	74	69	66	63	61	68	65	62	61	62	60	57	56								
0.8	91	83	80	76	73	70	89	82	79	75	73	70	77	74	72	70	71	69	66	65								
1.0	98	88	88	81	80	76	96	87	86	81	80	76	84	79	78	75	77	75	72	70								
1.25	104	92	94	86	87	82	101	91	92	85	86	81	89	84	84	80	82	80	77	75								
1.5	108	95	99	90	92	85	105	94	97	89	91	85	93	87	88	84	86	83	80	79								
2.0	113	98	105	94	99	90	110	97	103	93	97	90	98	92	94	89	91	88	85	83								
2.5	117	101	110	97	104	94	113	99	107	96	102	93	102	94	98	92	94	90	88	87								
3.0	119	102	113	99	108	96	115	101	110	98	105	95	104	96	101	94	97	92	90	89								
4.0	122	104	117	101	113	99	118	103	114	100	110	98	108	98	105	97	100	95	93	91								
5.0	124	105	120	103	116	101	120	104	116	102	113	100	110	100	107	98	102	97	95	93								
7.0	126	106	123	105	120	103	122	105	119	104	117	102	112	102	110	100	104	99	97	95								
10	128	107	126	106	124	105	124	106	121	105	120	104	114	103	112	102	106	100	99	97								