


■防犯灯(配光データシート)


※下記のデータは傾斜角度20°（標準取付時）の場合です。

名称	防犯灯
形名	DL-E13VA/VN
使用ランプ名(光源)	LEDモジュール
ランプメーカー	SHARP

全光束	810 lm
上部光束	24.3 lm
下部光束	785.7 lm
最大光度	1181.6 cd
メモ	データは初期の標準値

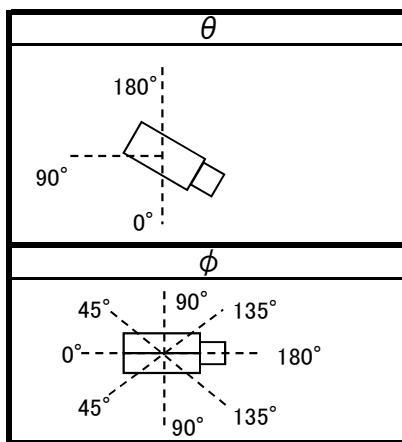

【鉛直配光曲線図】

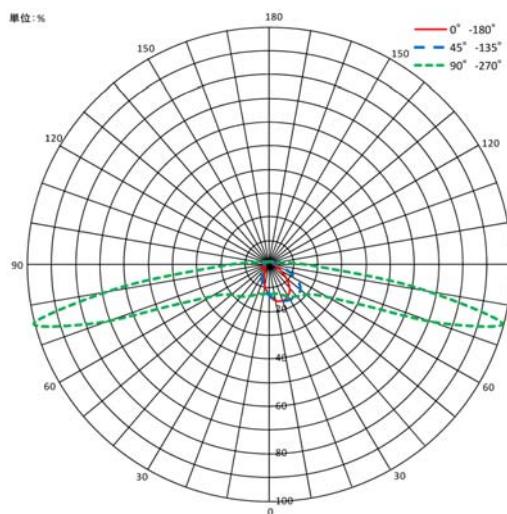

$\theta \backslash \phi$	0°	45°	90°	135°	180°
0°	197.8	197.8	197.8	197.8	197.8
5°	224.4	217.3	198.1	177.3	166.7
10°	240.0	231.7	201.9	154.9	131.1
15°	251.1	244.7	202.9	133.9	93.3
20°	253.3	254.5	214.1	112.1	51.1
25°	251.1	262.8	228.9	88.0	33.3
30°	240.0	267.0	246.9	57.1	31.1
35°	224.4	270.3	261.5	36.3	35.6
40°	197.8	271.5	276.3	28.0	48.9
45°	166.7	267.4	291.2	24.6	53.3
50°	131.1	252.2	313.0	23.6	42.2
55°	93.3	227.8	355.0	24.0	28.9
60°	51.1	187.2	447.0	25.1	24.4
65°	33.3	134.8	631.4	29.2	17.8
70°	31.1	81.7	1105.0	24.0	2.2
75°	35.6	43.5	1458.8	12.6	0.0
80°	48.9	25.8	899.8	2.9	0.0
85°	53.3	20.8	281.8	0.6	0.0
90°	42.2	23.7	46.7	4.6	0.0
95°	28.9	29.9	21.2	5.2	0.0
100°	24.4	21.1	13.4	3.9	0.0
105°	17.8	9.5	6.4	1.7	0.0
110°	2.2	2.2	7.2	1.5	0.0
115°	0.0	0.6	6.9	0.4	0.0
120°	0.0	4.8	3.9	0.0	0.0
125°	0.0	5.2	2.3	0.0	0.0
130°	0.0	4.4	0.0	0.0	0.0
135°	0.0	0.8	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0