


姿図

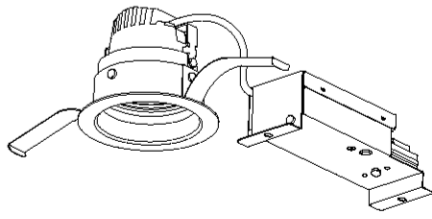

品番	DL-DD12H
光源	LED 3500K 9.5W
定格光束	590.0 lm
1/2照度角	11°
ビーム角	14°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.20 H
	B 0.20 H
保守率	良 0.63
	中 0.60
	否 0.53

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 ( × 0.01 )													
0.6	80	75	72	79	75	72	78	74	72	78	74	71	70	
0.8	86	81	78	85	81	77	84	80	77	83	79	76	75	
1	91	87	83	91	86	83	89	85	82	87	84	82	80	
1.25	96	92	88	95	91	88	93	89	87	91	88	86	83	
1.5	99	95	92	98	94	91	96	93	90	94	91	89	86	
2	104	101	98	103	100	97	100	98	95	98	96	94	91	
2.5	108	105	103	106	104	101	103	101	99	100	99	97	94	
3	110	108	106	108	106	105	105	104	102	102	101	100	96	
4	113	111	109	111	109	108	107	106	105	104	103	102	98	
5	114	113	112	112	111	110	108	107	106	105	104	103	99	

