




シャープ製LED照明器具 配光データシート 形名 DL-NA08/09NM

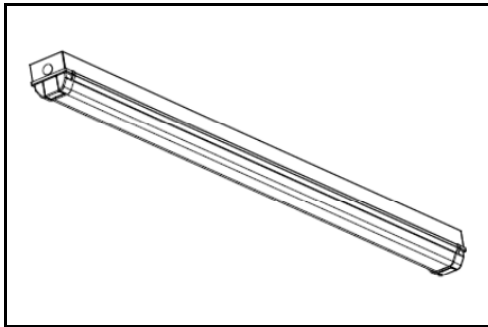


| | |
|------|----------|
| 器具光束 | 5,500 lm |
| 上方光束 | 442 lm |
| 下方光束 | 5,058 lm |
| 最大光度 | 1,581 cd |

初期値

| | |
|--------|----------------------|
| 光源 | LED |
| 形式 | ストレート型(直付型) |
| パネル | 乳白 |
| 色温度 | 5,000K |
| 保守率 | 良:0.86 中:0.81 否:0.72 |
| 最大取付間隔 | a-a 1.4H b-b 1.4H |
| 備考 | 防水仕様【IPX3】 |

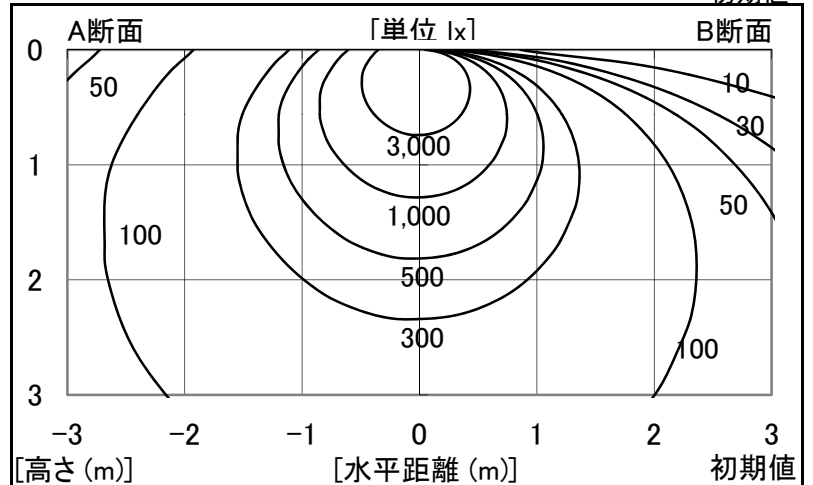

| 角度 | 光度[cd/1,000lm] | | |
|-----|----------------|------|------|
| | A-A' | B-B' | C-C' |
| 0 | 287 | 285 | - |
| 10 | 284 | 280 | - |
| 20 | 271 | 263 | - |
| 30 | 250 | 237 | - |
| 40 | 228 | 203 | - |
| 50 | 200 | 164 | - |
| 60 | 166 | 118 | - |
| 70 | 133 | 69 | - |
| 80 | 94 | 24 | - |
| 90 | 64 | 1 | - |
| 100 | 51 | 1 | - |
| 110 | 38 | 1 | - |
| 120 | 25 | 1 | - |
| 130 | 3 | 1 | - |
| 140 | 5 | 1 | - |
| 150 | 1 | 0 | - |
| 160 | 1 | 1 | - |
| 170 | 1 | 1 | - |
| 180 | 1 | 1 | - |

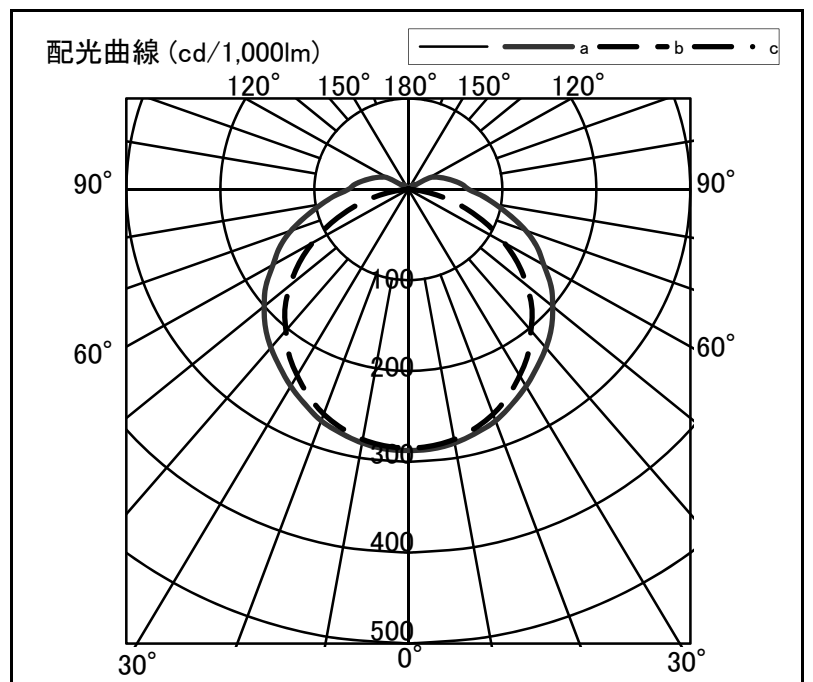

| 反射率 | 天井 80 | | | | | | 70 | | | | | | 50 | | | | | | 30 | | 20 | | 0 | |
|------|------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|----|----|----|----|---|----|---|
| | 壁 | | 70 | | 50 | | 30 | | 70 | | 50 | | 30 | | 50 | | 30 | | 30 | | 10 | | 0 | |
| 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0 | 10 | 0 |
| 室指数 | 照明率(×0.01) | | | | | | | | | | | | | | | | | | | | | | | |
| 0.6 | 62 | 57 | 46 | 44 | 36 | 35 | 60 | 56 | 45 | 43 | 35 | 34 | 42 | 41 | 34 | 33 | 33 | 32 | 27 | 24 | | | | |
| 0.8 | 75 | 68 | 58 | 54 | 47 | 45 | 72 | 66 | 56 | 53 | 46 | 45 | 53 | 51 | 45 | 43 | 43 | 42 | 36 | 34 | | | | |
| 1.0 | 83 | 75 | 67 | 62 | 56 | 53 | 80 | 72 | 65 | 61 | 55 | 52 | 61 | 58 | 52 | 50 | 50 | 49 | 43 | 40 | | | | |
| 1.25 | 91 | 81 | 76 | 70 | 65 | 61 | 87 | 79 | 73 | 68 | 63 | 60 | 69 | 65 | 60 | 58 | 58 | 56 | 50 | 47 | | | | |
| 1.5 | 97 | 86 | 83 | 75 | 72 | 67 | 93 | 83 | 80 | 73 | 70 | 66 | 75 | 70 | 66 | 63 | 63 | 61 | 56 | 52 | | | | |
| 2.0 | 106 | 92 | 93 | 83 | 83 | 75 | 101 | 89 | 89 | 81 | 80 | 74 | 83 | 77 | 76 | 71 | 72 | 69 | 64 | 60 | | | | |
| 2.5 | 111 | 96 | 100 | 88 | 90 | 81 | 106 | 94 | 96 | 86 | 88 | 80 | 89 | 82 | 82 | 77 | 77 | 74 | 69 | 66 | | | | |
| 3.0 | 115 | 99 | 105 | 92 | 96 | 86 | 110 | 96 | 101 | 90 | 93 | 84 | 94 | 86 | 87 | 81 | 82 | 78 | 74 | 70 | | | | |
| 4.0 | 121 | 103 | 112 | 97 | 105 | 92 | 115 | 100 | 108 | 95 | 101 | 90 | 99 | 91 | 94 | 87 | 88 | 84 | 79 | 76 | | | | |
| 5.0 | 124 | 105 | 117 | 100 | 110 | 96 | 119 | 103 | 112 | 98 | 106 | 94 | 103 | 94 | 99 | 91 | 92 | 87 | 83 | 80 | | | | |
| 7.0 | 128 | 108 | 123 | 104 | 117 | 101 | 122 | 105 | 117 | 102 | 113 | 99 | 108 | 98 | 104 | 95 | 97 | 92 | 88 | 85 | | | | |
| 10 | 132 | 110 | 127 | 107 | 123 | 105 | 126 | 108 | 122 | 105 | 118 | 103 | 112 | 101 | 109 | 99 | 101 | 95 | 92 | 89 | | | | |